

JOURNEY OF AIR

0,08-30
m³/min

3-1060
cfm

16
bar




MODULAR ADSORPTION COMPRESSED AIR DRYERS

DMD model adsorption dryers use a modular design for a lightweight, compact body. Having half the size and weight of traditional twin-tower adsorption dryers, they provide users with the advantage of flexible installation. This is one of the adsorption air dryer models with the lowest pressure drop in the world with its highly engineered inlet valve and discharge manifold design.

Advantages

- Low footprint, lightweight, compact design
- Corrosion-resistant aluminium structure
- Problem-free and reliable electronic control
- Can be mounted on the floor, bench, or wall
- Suitable layout for any workplace
- Easy to install and maintain
- High efficiency and flexibility
- Energy efficient
- Dew point from -40°C to -70°C (optional)

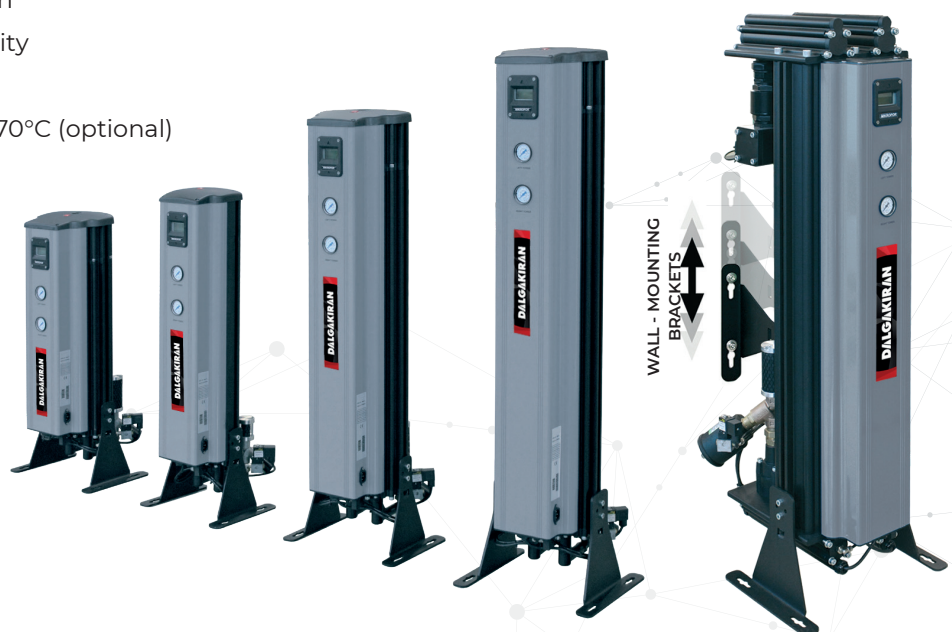

MODEL	Max. Pressure		Capacity		Connection Size	FilterSet	Voltage (V/ph/Hz)	Dimensions (mm)			Weight kg	Controller
	bar	psi	m³/min	cfm				Length	Width	Height		
DMD 3	16	232	0,08	3	G 1/2"	GK020 MX+MY+MP	230/1/50-60	336	320	558	17	Crouzet Millenium 3
DMD 5	16	232	0,17	6	G 1/2"	GK020 MX+MY+MP	230/1/50-60	320	320	633	19	Crouzet Millenium 3
DMD 10	16	232	0,33	12	G 1/2"	GK020 MX+MY+MP	230/1/50-60	320	320	908	27	Crouzet Millenium 3
DMD 15	16	232	0,42	15	G 1/2"	GK025 MX+MY+MP	230/1/50-60	350	370	808	31	Crouzet Millenium 3
DMD 20	16	232	0,58	21	G 1/2"	GK050 MX+MY+MP	230/1/50-60	350	370	1108	42	Crouzet Millenium 3
DMD 25	16	232	0,75	26	G 1/2"	GK050 MX+MY+MP	230/1/50-60	350	370	1258	48	Crouzet Millenium 3
DMD 30	16	232	0,83	29	G 1/2"	GK050 MX+MY+MP	230/1/50-60	350	370	1508	54	Crouzet Millenium 3
DMD 40	16	232	1,17	41	G 1 1/2"	GK0100 MX+MY+MP	230/1/50-60	495	410	1250	71	Crouzet Millenium 3
DMD 50	16	232	1,42	50	G 1 1/2"	GK0100 MX+MY+MP	230/1/50-60	495	410	1400	78	Crouzet Millenium 3
DMD 60	16	232	1,67	59	G 1 1/2"	GK0100 MX+MY+MP	230/1/50-60	495	410	1750	92	Crouzet Millenium 3
DMD 75	16	232	2,17	77	G 1 1/2"	GK0150 MX+MY+MP	230/1/50-60	622	430	1300	120	Crouzet Millenium 3
DMD 100	16	232	2,83	100	G 1 1/2"	GK0200 MX+MY+MP	230/1/50-60	622	430	1450	133	Crouzet Millenium 3
DMD 120	16	232	3,33	118	G 1 1/2"	GK0200 MX+MY+MP	230/1/50-60	622	430	1750	152	Crouzet Millenium 3
DMD 180	16	232	5,00	177	G 1 1/2"	GK0300 MX+MY+MP	230/1/50-60	734	410	1499	186	Crouzet Millenium 3
DMD 240	16	232	6,67	235	G 1 1/2"	GK0500 MX+MY+MP	230/1/50-60	889	410	1497	235	Crouzet Millenium 3
DMD 340	16	232	9,6	340	2"	*	230/1/50-60	994	400	1654	*	Crouzet Millenium 3
DMD 400	16	232	11,3	400	2"	*	230/1/50-60	1335	400	1554	*	Crouzet Millenium 3
DMD 500	16	232	14,2	500	2"	*	230/1/50-60	1505	400	1654	*	Crouzet Millenium 3
DMD 590	16	232	16,7	590	2"	*	230/1/50-60	1675	400	1754	*	Crouzet Millenium 3
DMD 735	16	232	20,8	735	3"	*	230/1/50-60	1675	400	2054	*	Crouzet Millenium 3
DMD 890	16	232	25,0	890	3"	*	230/1/50-60	1845	400	2054	*	Crouzet Millenium 3
DMD 1060	16	232	30,0	1060	3"	*	230/1/50-60	2015	400	2054	*	Crouzet Millenium 3

* Please contact the sales consultant

CORRECTION FACTORS FOR DMD SERIES												
Pressure (bar)	4,5	5	6	7	8	9	10	11	12	13	14	15
F1	0,69	0,75	0,88	1	1,12	1,25	1,37	1,50	1,62	1,74	1,87	1,99
Inlet Temperature (°C)	20	25	30	35	40	45	50	-	-	-	-	-
F2	1	1	1	1	0,80	0,73	0,59	-	-	-	-	-

DMD Dryer Sizing Example;
If a compressor delivers 2,0 m³/min at 10 bar, the dryer inlet temperature is 40 °C. please choose your dryer as follows;

Dryer Capacity = 2,0 / 1,37 / 0,80 = 1,82 m³/min

The correct dryer model for this application is DMD 75.

Correction Formula: Dryer Capacity = Air Delivery Capacity of the Compressors / F1 / F2

PRE FILTER (X)

Efficiency rating:
1 Micron particle removal & 0.5mg/m³ oil removal

FINE FILTER (Y)

Efficiency rating:
0.01 Micron particle removal & 0.01mg/m³ oil removal

PARTICLE FILTER (P)

Efficiency rating:
5 Micron particle removal
(removes desiccant particles after the dryer)

ACTIVATED CARBON FILTER (A)

Efficiency rating:
0.01 Micron particle removal & 0.003 mg/m³ oil removal