

1,7-50
m³/min

59-1766
cfm


50
bar



JOURNEY
OF
AIR

HIGH PRESSURE AIRLINE FILTERS

This model filters are produced in a weldless structure to withstand high pressures. High-pressure test guarantee safe and efficient operation.

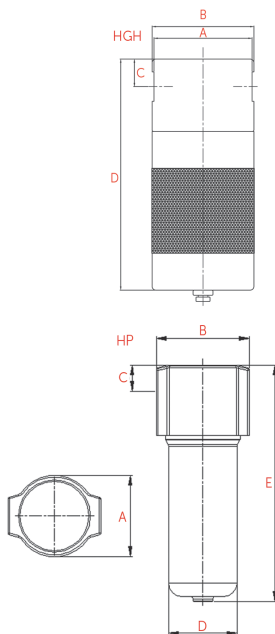

Advantages

- Durable and compact
- Safe and efficient operation
- High performance
- Strong and reliable design
- Excellent high-pressure applications
- Product performance warranty
- Carbon steel filters designed for 350 bar (optional)
- Sufficient wall thickness
- High-pressure tested
- Anodised interior and exterior surfaces

| MODEL | Max. Pressure | | Capacity | | Connection Size | Element Model | Dimensions (mm) | | | |
|----------|---------------|-----|---------------------|------|-----------------|---------------|-----------------|-------|-------|-------|
| | bar | psi | m ³ /min | cfm | | | A | B | C | D |
| HGO 100 | 50 | 725 | 1,7 | 59 | G 1/4" | M25 | 113,4 | 115,4 | 25,75 | 155 |
| HGO 300 | 50 | 725 | 5,0 | 177 | G 1/2" | M50 | 113,4 | 115,4 | 25,75 | 158,5 |
| HGO 600 | 50 | 725 | 10,0 | 353 | G 3/4" | M100 | 109,4 | 115,4 | 32,25 | 207 |
| HGO 850 | 50 | 725 | 14,2 | 500 | G 1" | M150 | 133 | 138 | 37,35 | 250 |
| HGO 1200 | 50 | 725 | 20,0 | 706 | G 1" | M200 | 133 | 138 | 37,35 | 314 |
| HGO 1600 | 50 | 725 | 26,7 | 942 | G 1 1/2" | M250 | 128 | 138 | 44,4 | 368 |
| HGO 2500 | 50 | 725 | 41,7 | 1471 | G 2" | M2500 | 145 | 158 | 51,5 | 393 |
| HGO 3000 | 50 | 725 | 50,0 | 1766 | G 2 1/2" | M3000 | 160 | 178 | 57,6 | 386 |