

0,4-36,7
m³/min

15-1295
cfm

16
bar




JOURNEY
OF
AIR

WATER SEPARATORS

Dalgakiran water separators are designed to remove liquid water and some particulates in compressed air at the compressor outlet. Their unique centrifugal effect separates heavier-than-air matter and the low pressure drop makes them energy-efficient.

Advantages

Dalgakiran's G WS water separators have 1/4" - 3" pipes for flow rates of 2200 m³/h. Line filters should be used to remove unwanted substances left in the compressed air after the extremely efficient water separators.

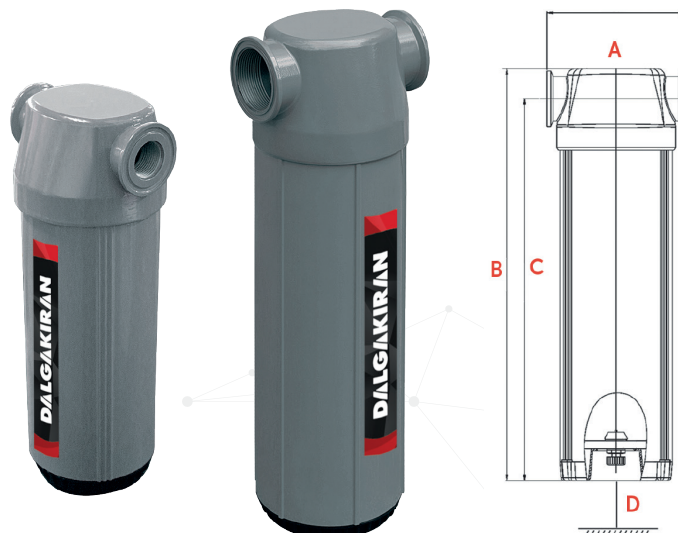

MODEL	Max. Pressure		Capacity		Connection Size	Dimensions (mm)			
	bar	psi	m ³ /min	cfm		A	B	C	D
G 25 WS	16	232	0,4	15	G 1/4"	103	257,5	236	160
G 100 WS	16	232	1,7	59	G 1/2"	103	257,5	236	210
G 200 WS	16	232	3,3	118	G 3/4"	123	304	277	285
G 300 WS	16	232	5,0	177	G 1"	123	304	277	380
G 600 WS	16	232	10,0	353	G1 1/2"	123	320	285	470
G 1200 WS	16	232	20,0	706	G 2"	160	484	443	560
G 2200 WS	16	232	36,7	1295	G 3"	193	546	490	610

CORRECTION FACTORS FOR HG WS COMPRESSED AIR FILTER SERIES										
Operating Pressure (barg)	1	3	5	7	9	11	13	15	16	20
PSIG	15	44	73	100	131	160	189	218	232	290
Correction Factor	0,5	0,71	0,87	1	1,12	1,22	1,32	1,44	1,57	1,63